

# GS66504B-EVBDB GaN E-HEMT Daughter Board and GS665MB-EVB Evaluation Platform

## User's Guide

Visit [www.gansystems.com](http://www.gansystems.com) for the latest version of this user's guide.



### DANGER!

This evaluation kit is designed for engineering evaluation in a controlled lab environment and **should be handled by qualified personnel ONLY**. High voltage will be exposed on the board during the test and even brief contact during operation may result in severe injury or death.

Never leave the board operating unattended. After it is de-energized, always wait until all capacitors are discharged before touching the board.



### CAUTION:

This product contains parts that are susceptible to damage by electrostatic discharge (ESD). Always follow ESD prevention procedures when handling the product.

## Overview

The GS665XXX-EVBDB daughter board style evaluation kit consists of two GaN Systems 650V GaN Enhancement-mode HEMTs (E-HEMTs) and all necessary circuits including half bridge gate drivers, isolated power supplies and optional heatsink to form a functional half bridge power stage. It allows users to easily evaluate the GaN E-HEMT performance in any half bridge-based topology, either with the universal mother board (P/N: GS665MB-EVB) or users' own system design.

### Features:

- Serves as a reference design and evaluation tool as well as deployment-ready solution for easy in-system evaluation.
- Vertical mount style with height of 35mm, which fits in majority of 1U design and allows evaluation of GaN E-HEMT in traditional through-hole type power supply board.
- Current shunt position for switching characterization testing
- Universal form factor and footprint for all products

The daughter board and universal mother board ordering part numbers are below:

Table 1 Ordering part numbers

Part Number	GaN E-HEMT P/N:	Description
GS66502B-EVBDB	GS66502B	GaN E-HEMT 650V/7.5A, 200mΩ
GS66504B-EVBDB	GS66504B	GaN E-HEMT 650V/15A, 100mΩ
GS66508B-EVBDB	GS66508B	GaN E-HEMT 650V/30A, 50mΩ
GS66508T-EVBDB	GS66508T	GaN E-HEMT top side cooled 650V/30A, 50mΩ
GS66516T-EVBDB	GS66516T	GaN E-HEMT top side cooled 650V/60A, 25mΩ
GS665MB-EVB		Universal 650V Mother Board

### Control and Power I/Os:

The daughter board GS665XXX-EVBDB circuit diagram is shown in Figure 1. The control logic inputs on 2x3 pin header J1 are listed below:

Table 2 Control pins

Pin	Description
ENA	Enable input. It is internally pulled up to VCC, a low logic disables all the PWM gate drive outputs.
VCC	+5V auxiliary power supply input for logic circuit and gate driver. On the daughter board there are 2 isolated 5V to 9V DC/DC power supplies for top and bottom switches.
VDRV	Optional 9V gate drive power input. This pin allows users to supply separate gate drive power supply. By default VDRV is connected to VCC on the daughter board via a 0 ohm jumper FB1. If bootstrap mode is used for high side gate drive, connect VDRV to 9V
PWMH	High side PWM logic input for top switch Q1. It is compatible with 3.3V and 5V
PWML	Low side PWM logic input for bottom switch Q2. It is compatible with 3.3V and 5V
0V	Logic inputs and gate drive power supply ground return.

The 3 power pins are:

- VDC+: Input DC Bus voltage
- VSW: Switching node output
- VDC-: Input DC bus voltage ground return. Note that control ground 0V is isolated from VDC-.

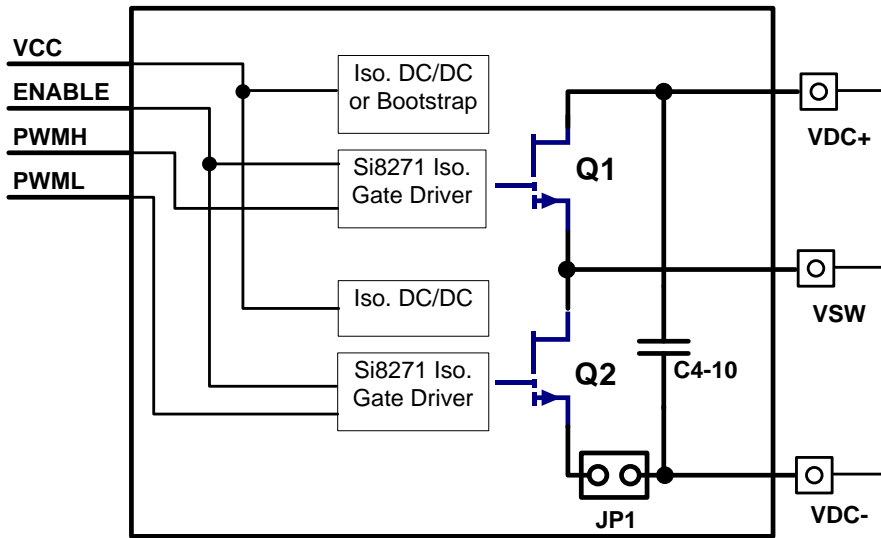


Figure 1 GS665XXX-EVBDB Evaluation Board Block Diagram

### GS66504B-EVBDB half bridge daughter board

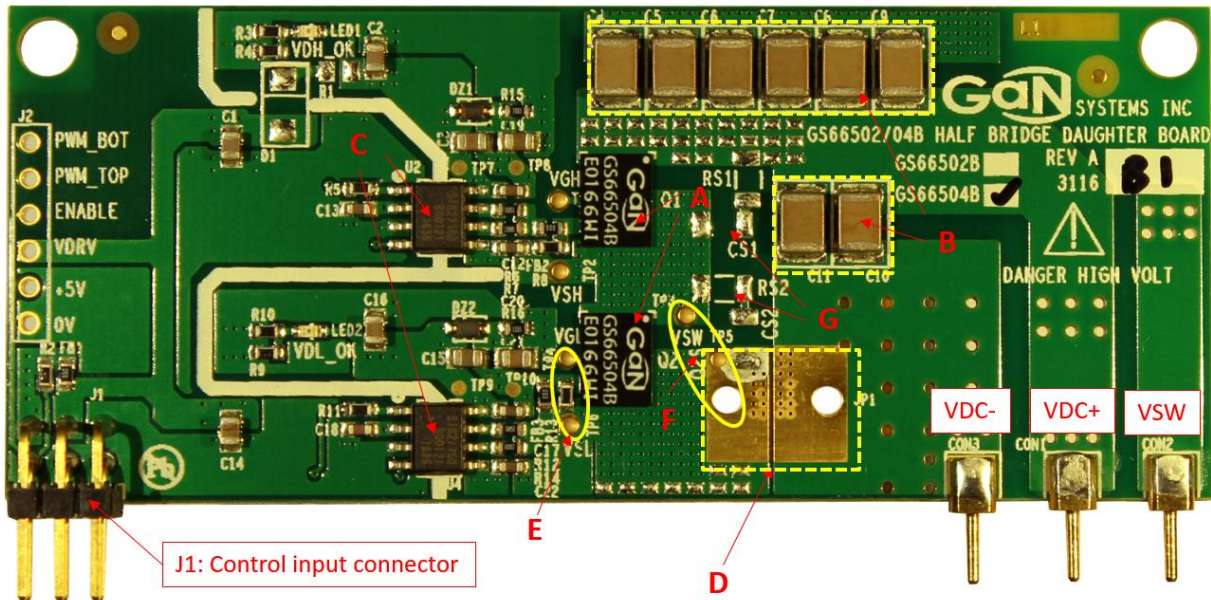


Figure 2 GS66504B-EVBDB top side

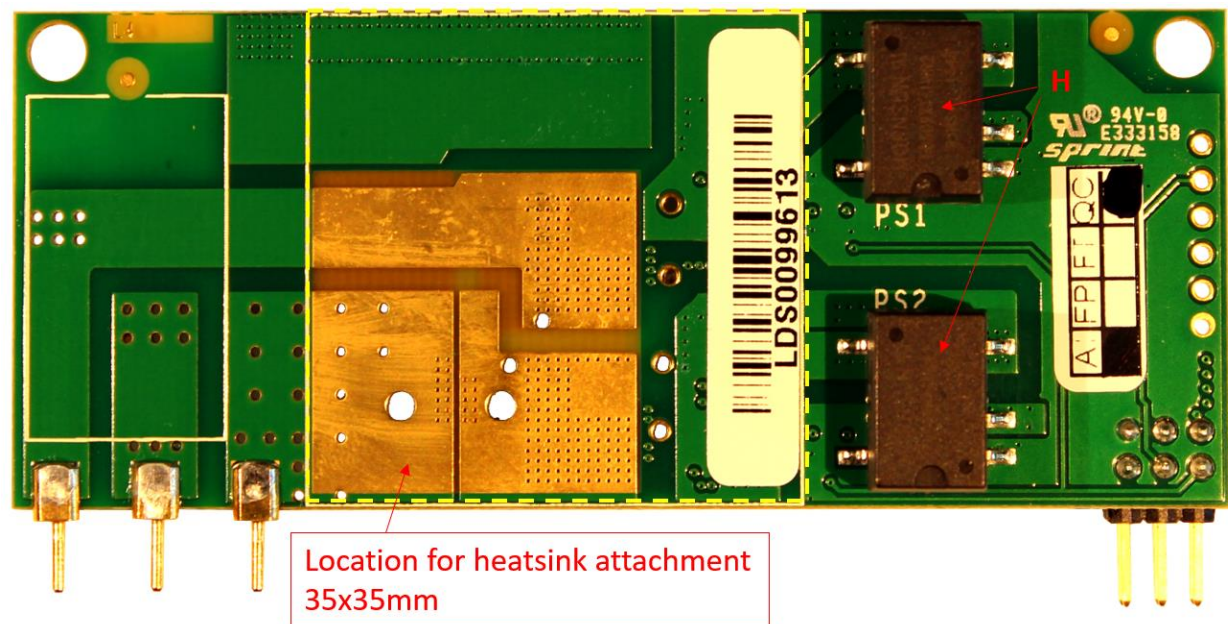


Figure 3 GS66504B-EVBDB bottom side

- A. 2x GaN Systems 650V E-HEMT GS66504B, 15A/100mΩ
- B. Decoupling capacitors C4-C11
- C. Isolated gate driver Silab Si8271GB-IS
- D. Optional current shunt position JP1.
- E. Test points for bottom Q2  $V_{GS}$ .
- F. Recommended probing positions for Q2  $V_{DS}$ .
- G. Optional RC Snubber (RS1/CS1, RS2/CS2), not populated
- H. 5V-9V isolated DC/DC gate drive power supply

GaN E-HEMTs:

- This daughter board includes two GaN Systems E-HEMT GS66504B (650V/15A, 100mΩ) in a GaNPx™ B type package. The large S pad serves as source connection and thermal pad.

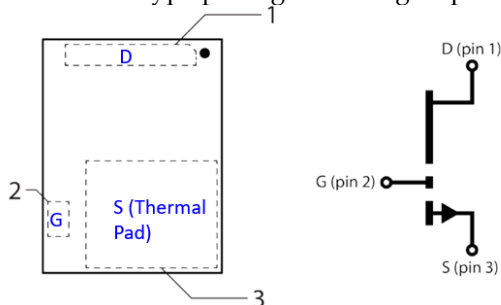


Figure 4 Package outline of GS66504B

Gate drive power supply:

- Bipolar gate drive bias with +6V and -3V for turning off is chosen for this design for more robust gate drive and better noise immunity.
- 5V-9V isolated DC/DC converters are used for gate drive. 9V is then split into +6V and -3V bias by using 6V Zener diode
- By default gate drive supply input VDRV is tied to VCC +5V via 0Ω jumper (FB1). Remove FB1 if separate gate drive input voltage is to be used.

Gate driver circuit:

- Silab Si8271GB-IS (6V gate drive) or Si8271AB-IS (6/-3 gate bias) isolated gate driver can be used for this design. This driver is compatible with 6V gate drive with 4V UVLO and has CMTI dv/dt rating up to 200V/ns. It has separated source and sink drive outputs which eliminates the need for additional diode.
- GaN E-HEMT switching speed and slew rate can be directly controlled by the gate resistor. By default the turn-on R<sub>gate</sub> (R6/R12) is 15Ω and turn-off gate resistor (R7/R14) is 2Ω. User can adjust the values of gate resistors to fine tune the turn-on and off speed.
- FB1/FB2 are 0603 footprints for optional ferrite beads for damping gate ringing/oscillation. By default they are populated with 0Ω jumpers. If gate oscillation is observed, it is recommended to replace them with ferrite bead with Z=10-20Ω@100MHz.

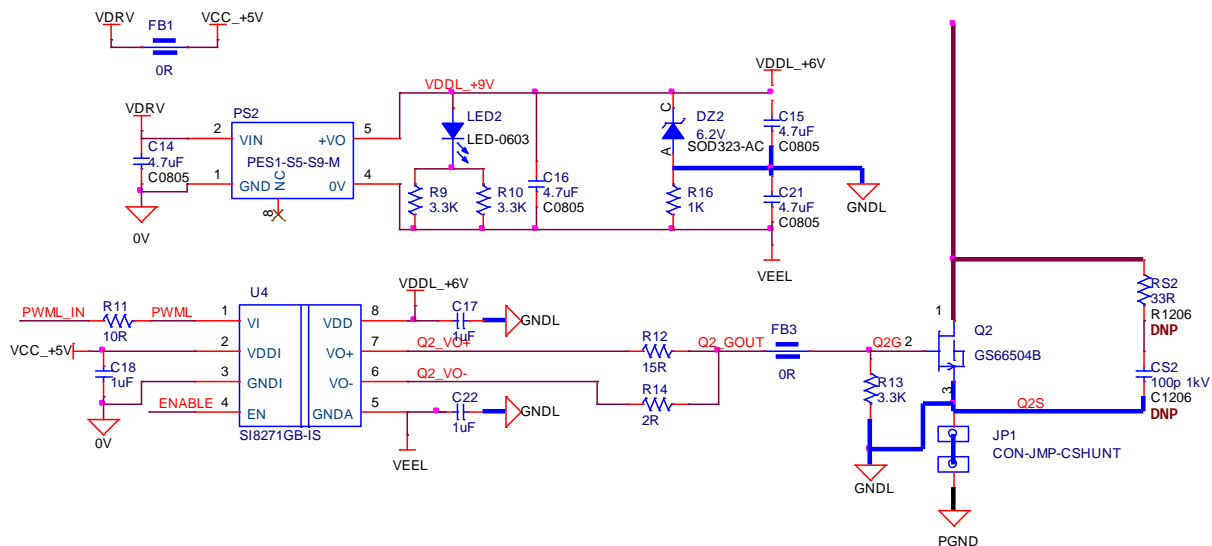


Figure 5 Gate driver circuit

RC Snubber:

RS1/CS1 and RS2/CS2 are place holders to allow user to experiment with RC snubber circuit (not installed). At high frequency operation the power dissipation for RS1/RS2 needs to be closely watched and CS1/CS2 should be sized correctly. It is recommended to start with 33-47pF and 10-20Ω.

Current shunt JP1:

- The board provides an optional current shunt position JP1 between the source of Q2 and power ground return. This allows drain current measurement for switching characterization test such as Eon/Eoff measurement.
- The JP1 footprint is compatible with T&M Research SDN series coaxial current shunt (recommended P/N: SDN-414-10, 2GHz B/W, 0.1Ω)
- If current shunt is not used JP1 must be shorted. JP1 affects the power loop inductance and its inductance should be kept as low as possible. Use a copper foil or jumper with low inductance.

**CAUTION:**

Check the JP1 before the first time use. To complete the circuit JP1 needs to be either shorted or a current shunt must be inserted before powering up.

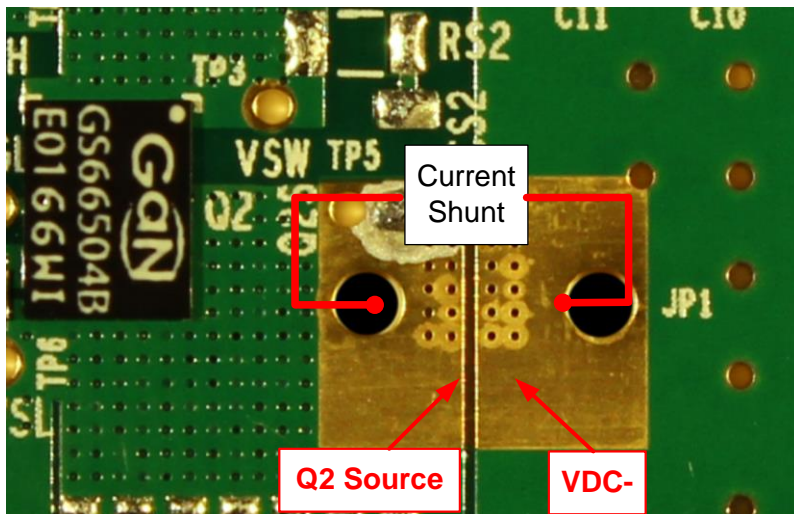


Figure 6 Current shunt position JP1

Measurement with current shunt:

1. When measuring VSW with current shunt, ensure all channel probe grounds and current shunt BNC output case are all referenced to the source end of Q2 before the current shunt. The recommended setup of probes is shown as below.
2. The output of coaxial current shunt can be connected to oscilloscope via 50Ω termination impedance to reduce the ringing.
3. The measured current is inverted and can be scaled by using:  $I_d = V_{id} / R_{sense}$ .

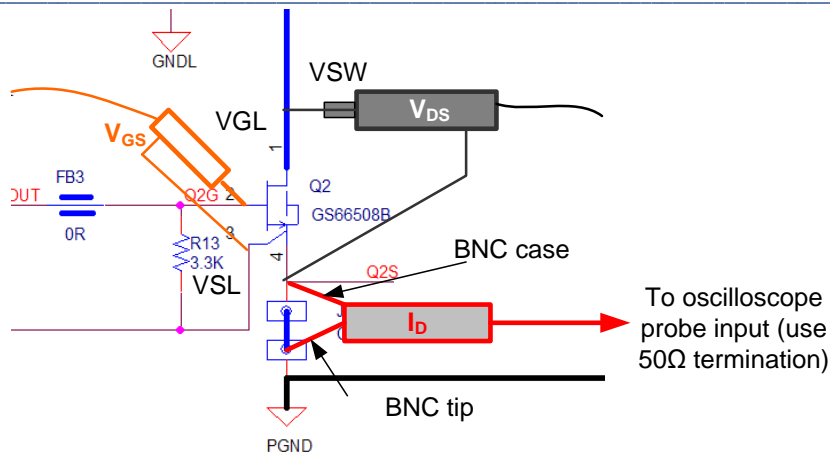


Figure 7 Recommended probe connection with current shunt

Thermal design:

1. GS66504B has a thermal pad at the bottom side for heat dissipation. The heat is transferred to the bottom side of PCB using thermal vias and copper plane.
2. A heatsink (35x35mm size) can be attached to the bottom side of board for optimum cooling. Thermal Interface Material (TIM) is needed to provide electrical insulation and conformance to the PCB surface. The daughter board evaluation kit supplies with a sample 35x35mm fin heatsink (not installed), although other heatsinks can also be used to fit users' system design.
3. A thermal tape type TIM (Bergquist® Bond-Ply 100) is chosen for its easy assembly. The supplied heatsink has the thermal tape pre-applied so simply peel off the protective film and attach the heatsink to the back of board as marked in Figure 3.
4. Forced air cooling is recommended for power testing.

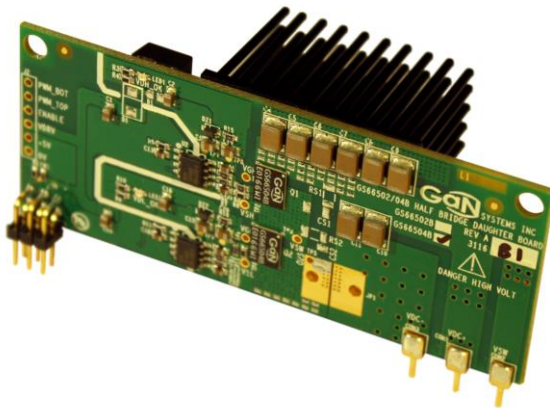


Figure 8 The daughter board with heatsink attached

**CAUTION:**

There is no on-board over-temperature protection. Device temperature must be closely monitored during the test. Never operate the board with device temperature exceeding  $T_{J\_MAX}$  (150°C)

Using GS665XXX-EVBDB with universal mother board GS665MB-EVB

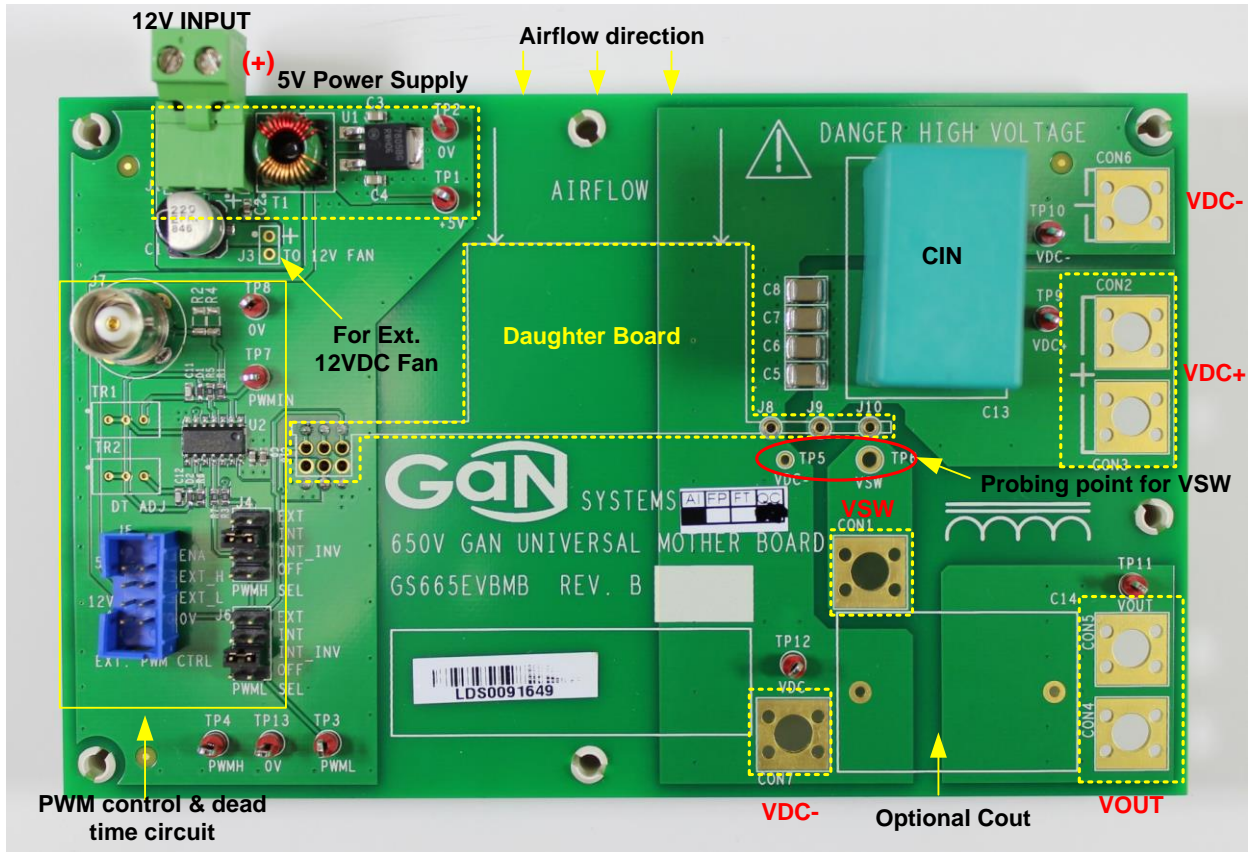


Figure 9 650V universal mother board GS665MB-EVB

GaN Systems provides a universal 650V mother board (ordering part number: GS665MB-EVB, sold separately) that can be used as the basic evaluation platform for all the daughter boards.

The universal 650V mother board evaluation kit includes following items:

1. Mother board GS665MB-EVB
2. 12VDC Fan

12V input:

The board can be powered by 9-12V on J1. On-board voltage regulator creates to 5V for daughter board and control logic circuits. J3 is used for external 12VDC fan.

PWM control circuit:



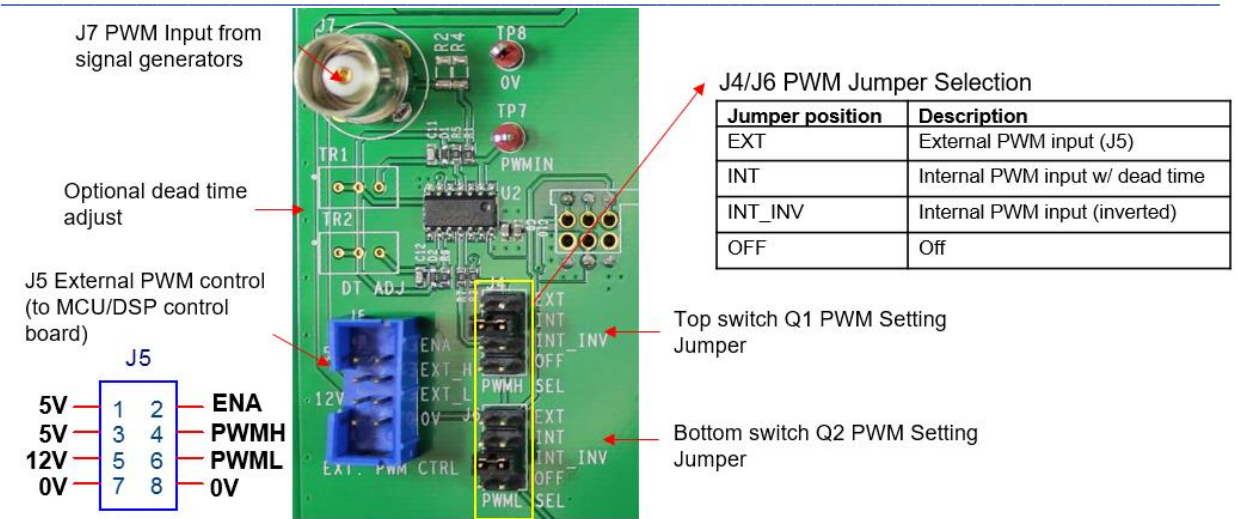


Figure 10 PWM control input and dead time circuit

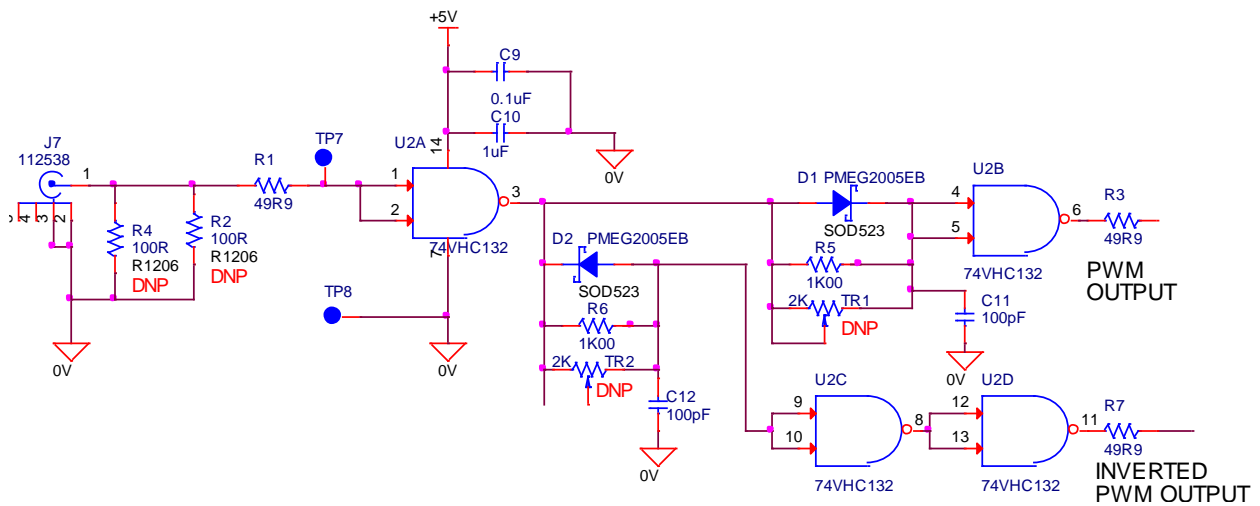


Figure 11 On board dead time generation circuit

The top and bottom switches PWM inputs can be individually controlled by two jumpers J4 and J6. Users can choose between a pair of complementary on-board internal PWM signals (non-inverted and inverted, controlled by J7 input) with dead time or external high/low side drive signals from J5 (users' own control board).

An on-board dead time generation circuit is included on the mother board. Dead time is controlled by two RC delay circuits, R6/C12 and R5/C11. The default dead time is set to about 100ns. Additionally two potentiometers locations are provided (TR1/TR2, not included) to allow fine adjustment of the dead time if needed.



**WARNING!**

ALWAYS double check the jumper setting and PWM gate drive signals before applying power. Incorrect PWM inputs or jumper settings may cause device failures

Test points:

Test points are designed in groups/pairs to facilitate probing:

Test points	Name	Description
TP1/TP2	+5V/0V	5V bias power
TP7/TP8	PWMIN/0V	PWM input signal from J7
TP4/TP3/TP13	PWMH/PWML/0V	High/low side gate signals to daughter board
TP9/TP10	VDC+/VDC-	DC bus voltage
TP11/TP12	VOUT/VDC-	Output voltage
TP6/TP5	VSW/VDC-	Switching node output voltage (for HV oscilloscope probe)

Power connections:

CON1-CON7 mounting pads are designed to be compatible with following mounting terminals:

- #10-32 Screw mount,
- Banana Jack PCB mount (Keystone P/N: 575-4), or
- PC Mount Screw Terminal (Keystone P/N: 8191)

Output passives (L and C14)

An external power inductor (not included) can be connected between VSW (CON1) and VOUT (CON4/5) or VDC+ (CON2/3) for double pulse test. Users can choose their inductor size to meet the test requirement. Generally it is recommended to use power inductor with low inter-winding capacitance to obtain best switching performance. For the double pulse testing we use 2x 60uH/40Amp inductor (CWS, P/N: HF467-600M-40AV) in series. C14 is designed to accommodate a film capacitor as output filter.

Double pulse test mode

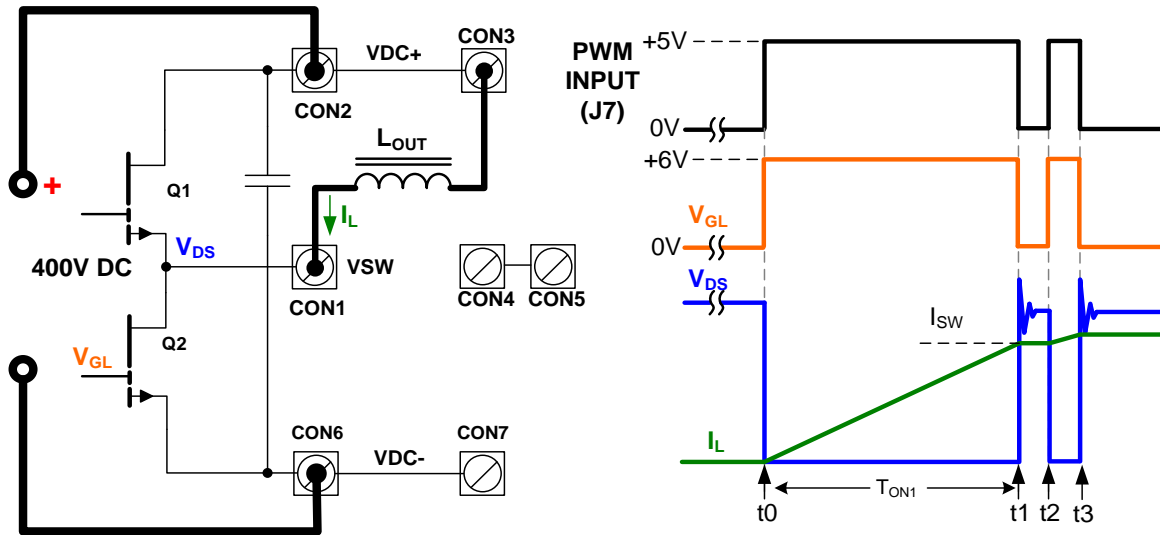


Figure 12 Double pulse test setup

Double pulse test allows easy evaluation of device switching performance at high voltage/current without the need of actually running at high power. It can also be used for switching loss (Eon/Eoff) measurement and other switching characterization parameter test.

The circuit configuration and operating principle can be found in Figure 12:

1. The output inductor is connected to the VDC+.
2. At  $t_0$  when Q2 is switched on, the inductor current starts to ramp up until  $t_1$ . The period of first pulse  $T_{ON1}$  defines the switching current  $I_{SW} = (V_{DS} * T_{ON1}) / L$ .
3.  $t_1-t_2$  is the free wheeling period when the inductor current  $I_L$  forces Q1 to conduct in reverse.
4.  $t_1$  (turn-off) and  $t_2$  (turn-on) are of interest for this test as they are the hard switching transients for the half bridge circuit when Q2 is under high switching stress.
5. The second pulse  $t_2-t_3$  is kept short to limit the peak inductor current at  $t_3$ .


The double pulse signal can be generated using programmable signal generator or microcontroller/DSP board. As this test involves high switching stress and high current, it is recommended to set the double pulse test gate signal as single trigger mode or use long repetition period (for example >50-100ms) to void excess stress to the switches. Q1 can be kept off during the test or driven synchronously (J4 set to OFF or INT\_INV) and Q2 is set to INT (or EXT position if PWM signal is from J5).



**WARNING!**

Limit the maximum switching test current to 15A and ensure maximum drain voltage including ringing is below 650V for pulse testing. Exceeding this limit may cause damage to the devices.

Buck/Standard half bridge mode

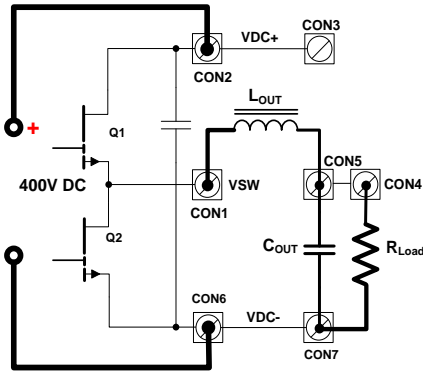


This is standard half bridge configuration that can be used in following circuits :

- Synchronous Buck DC/DC
- Single phase half bridge inverter
- ZVS half bridge LLC
- Phase leg for full bridge DC/DC or
- Phase leg for a 3-phase motor drive

Jumper setting:

- J4 (Q1): INT
- J6 (Q2): INT\_INV

### Boost mode

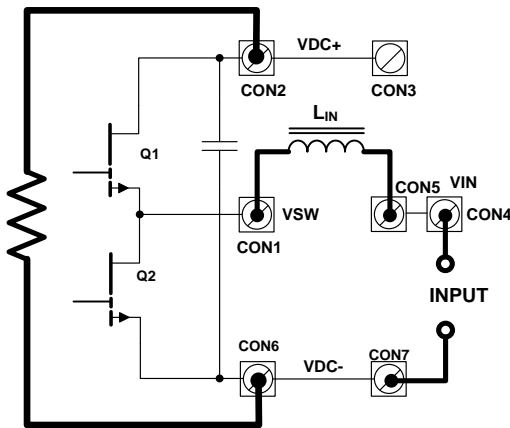

When the output becomes the input and the load is attached between VDC+ and VDC-, the board is converted into a boost mode circuit and can be used for:


- Synchronous Boost DC/DC
- Totem pole bridgeless PFC

Jumper setting:

- J4 (Q1): INT\_INV
- J6 (Q2): INT

**Using GS665XXX-EVBDB in system:**

The daughter board allows users to easily evaluate the GaN performance in their own systems. Refer to the footprint drawing of GS665XXX-EVBDB as shown below:

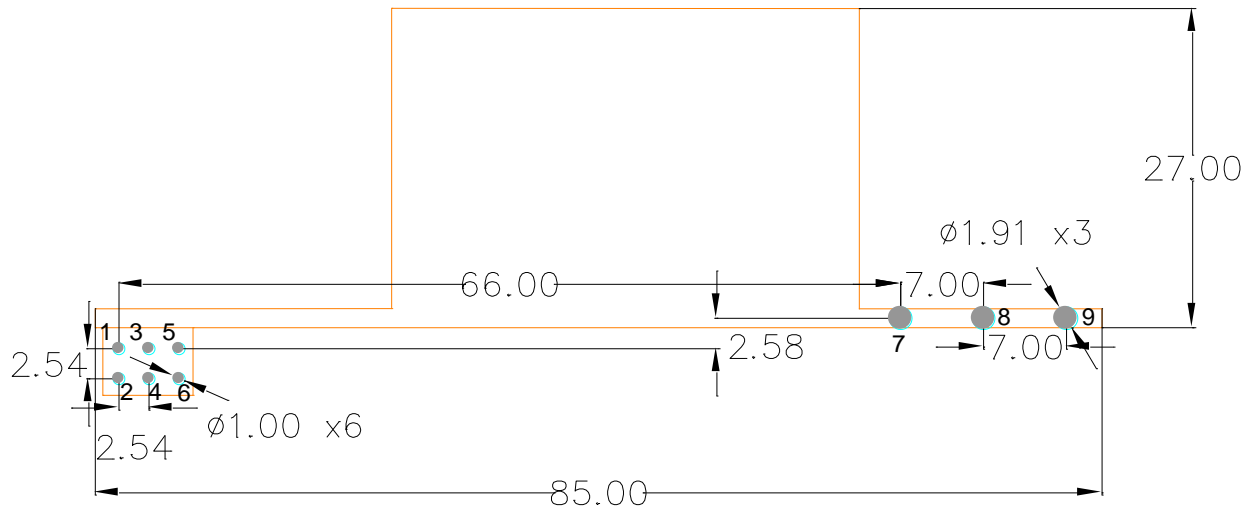

1. All units are in mm.
2. Pin 1-6: Dia. 1mm
3. Pin 7-9: 1.91mm (75mil) mounting hole for Mill-max Receptacle P/N: 0312-0-15-15-34-27-10-0.

Figure 13 Recommended footprint drawing of daughter board GS665XXX-EVBDB

## Quick Start procedure – Double pulse test

Follow the instructions below to quickly get started with your evaluation of GaN E-HEMT. Equipment and components you will need:

- Four-channel oscilloscope with 500MHz bandwidth or higher
  - high bandwidth (500MHz or higher) passive probe
  - high bandwidth (500MHz) high voltage probe (>600V)
  - AC/DC current probe for inductor current measurement
  - 12V DC power supply
  - Signal generator capable of creating testing pulses
  - High voltage power supply (0-400VDC) with current limit.
  - External power inductor (recommend toroid inductor 50-200uH)
1. Check the JP1 on daughter board GS665XXX-EVBDB. Use a copper foil and solder to short JP1.
  2. Install GS665XXX-EVBDB on the mother board. Press all the way down until you feel a click. Connect probe between VGL and VSL for gate voltage measurement.
  3. Set up the mother board:
    - a. Connect 12VDC bias supply to J1.
    - b. Connect PWM input gate signal (0-5V) to J7. If it is generated from a signal generator ensure the output mode is high-Z mode.
    - c. Set J4 to OFF position and J7 to INT.
    - d. Set High voltage (HV) DC supply voltage to 0V and ensure the output is OFF. Connect HV supply to **CON2** and **CON6**.
    - e. Use HV probe between TP6 and TP5 for Vds measurement.
    - f. Connect external inductor between **CON1** and **CON3**. Use current probe to measure inductor current IL.
  4. Set up and check PWM gate signal:
    - a. Turn-on 12VDC power.
    - b. Check the 2 LEDs on the daughter board. They should be turned on indicating the isolated 9V is present.
    - c. Set up signal generator to create the waveforms as shown in Figure 12. Use equation  $I_{sw} = (V_{DS} * T_{ON1}) / L$  to calculate the pulse width of the first pulse and ensure the  $I_{sw\_max}$  is  $\leq 15A$  at 400VDC.
    - d. Set the operation mode to either single trigger or Burst mode with repetition period of 100ms.
    - e. Turn on the PWM output and check on the oscilloscope to make sure the VGL waveform is present and matches the PWM input.
  5. Power-on:
    - a. Turn on the output of the HV supply. Start with low voltage and slowly ramp the voltage up until it reaches 400VDC. During the ramping period closely observe the the voltage and current waveforms on the oscilloscope.
  6. Power-off:
    - a. After the test is complete, slowly ramp down the HV supply voltage to 0V and turn off the output. Then turn off the 12V bias supply and signal generator output.

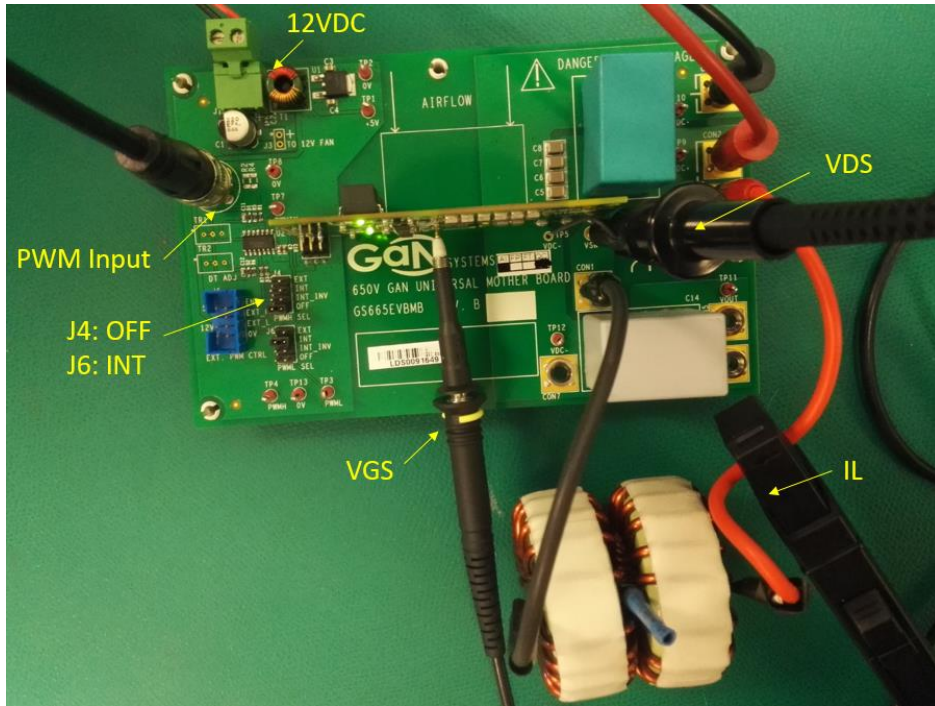


Figure 14 Double pulse test setup example (GS66504B-EVBDB)

**Test results – GS66504B-EVBDB**

Half bridge double pulse test ( $V_{DS}=400V$ ,  $I_{MAX} = 15A$ ,  $L=120\mu H$ ,  $R_{G(ON)}=15\Omega$ ,  $R_{G(OFF)}=2\Omega$ ,  $V_{GS}=+6/-3V$ ):

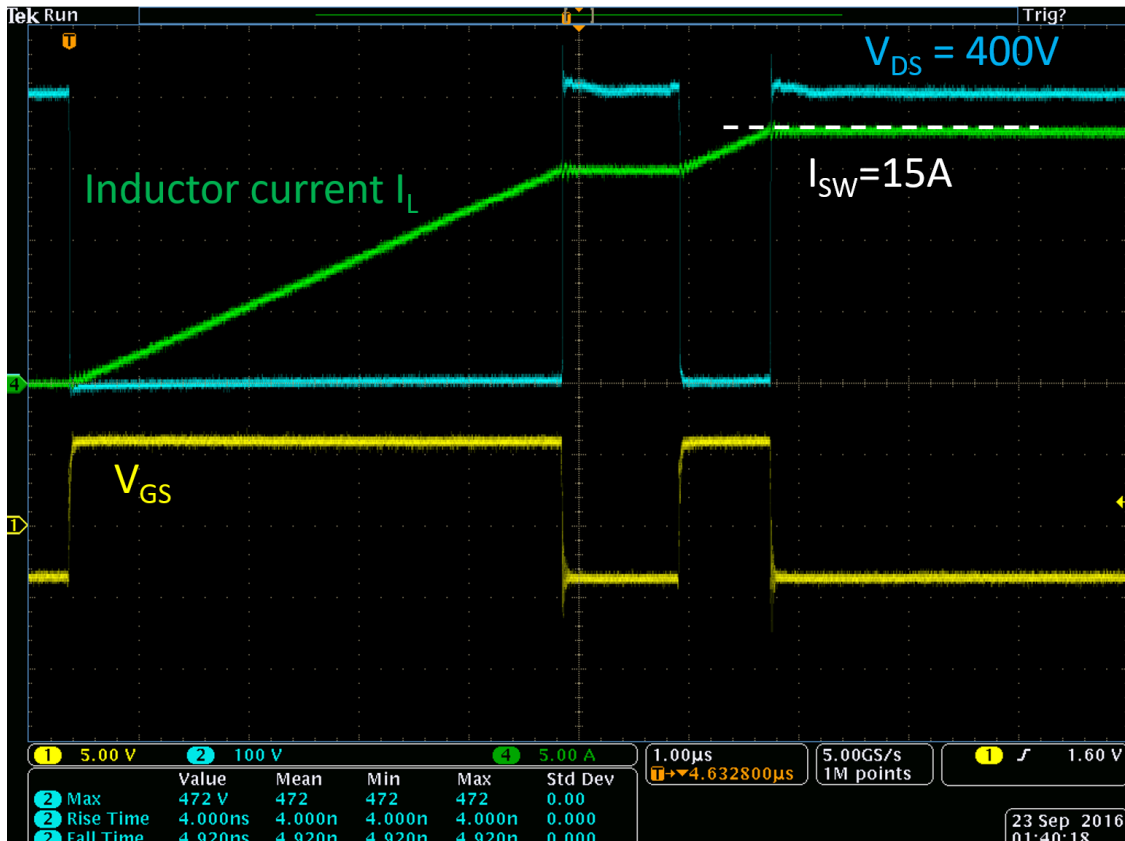




Figure 15 400V/15A double pulse test waveform

Figure 15 shows the hard switching on waveforms at 400V/15A. A  $V_{ds}$  dip can be seen due to the rising drain current ( $di/dt$  in the power loop  $\Delta V=L_p \times di/dt$ , where  $L_p$  is the total power loop inductance). After the drain current reaches the inductor current, the  $V_{ds}$  starts to fall. The  $V_{gs}$  undershoot spike is caused by the miller feedback via  $C_{gd}$  under negative  $dv/dt$ .

Due to the low gate charge and small  $R_{G(OFF)}$ , GaN E-HEMT gate has limited control on the turn-off  $dv/dt$ . Instead the  $V_{ds}$  rise time is determined by how fast the turn-off current charges switching node capacitance ( $C_{oss}$ ).

The low  $C_{oss}$  of GaN E-HEMT and low parasitic inductance of GaNPX™ package together with optimized PCB alyout, enables a fast and clean turn-off  $V_{ds}$  waveform with only 50V the turn-off  $V_{ds}$  overshoot at  $dv/dt > 100V/ns$ . The measured rise time is 3.9ns at 400V and 15A hard turn-off.



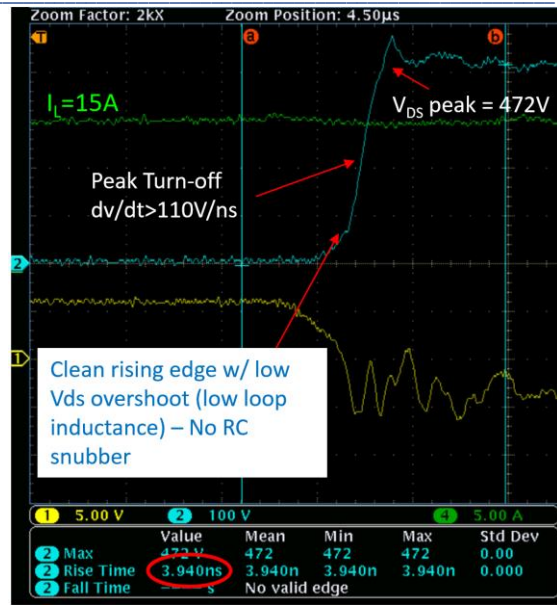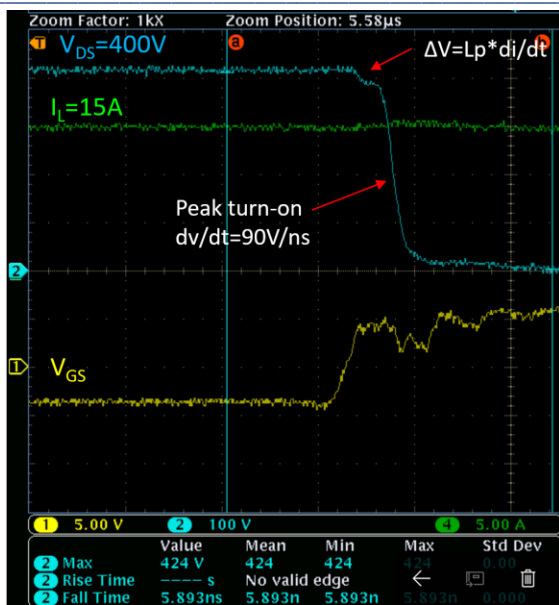

a) hard switching turn-on 400V/15A (tf=5.9ns)

b) hard switching turn-off 400V/15A

Figure 16 Double puls test switching transient waveforms

Switching Loss energy (Eon/Eoff) measurement

A T&M search coaxial current shunt (SDN-414-10, 0.1Ω) is installed for switching loss measurement as shown below.

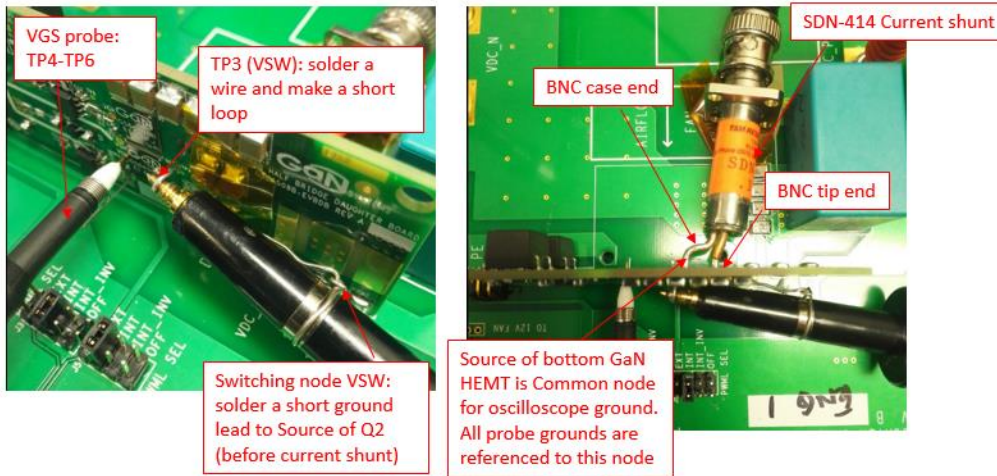


Figure 17 Eon/Eoff measurement probe connection with current shunt

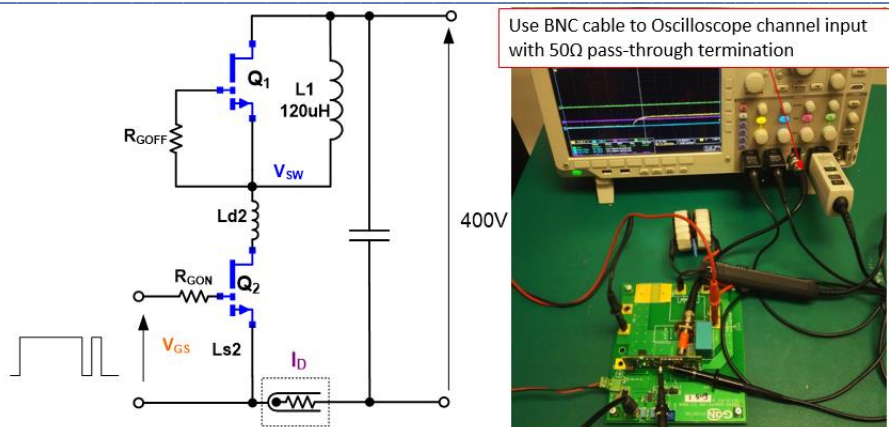


Figure 18 Eon/Eoff measurement and test bench setup

The switching energy can be calculated from the measured switching waveform  $P_{sw} = V_{ds} \cdot I_d$ . The integral of the  $P_{sw}$  during switching period is the measured switching loss. The channel deskewing is critical for measurement accuracy. It is recommended to manually deskew  $I_d$  against  $V_{ds}$  as shown in Figure 19. The drain current spike is caused by charging the high side switch  $C_{oss}$  ( $Q_{oss}$  loss).



Figure 19 Turn-on switching loss measurement ( $E_{on}=41\mu J$ , 400V/15A)

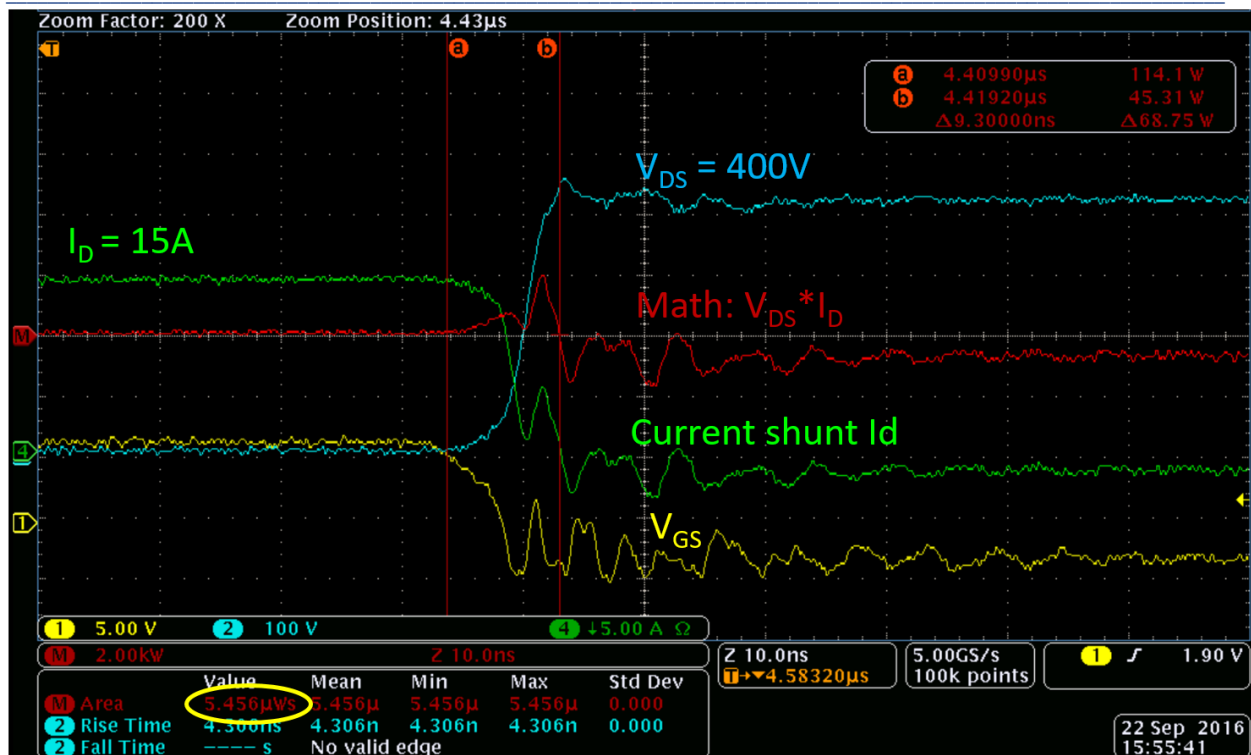


Figure 20 Turn-off switching loss measurement ( $E_{off}=5.5\mu J$ , 400V/15A)

The switching loss measurements with drain current from 0 to 15A can be found in Figure 21. The turn-on loss dominates the overall hard switching loss.  $E_{on}$  at 0A is the  $Q_{oss}$  loss caused by charging  $C_{oss}$  at high side switch.

The turn-off loss remain almost constant from 0A up to 10A about 3.6µJ. the measured  $E_{off}$  matches well with the  $E_{oss}$  @400V, which indicates that turn-off energy is dominated by  $E_{oss}$ , the energy required to charge  $C_{oss}$  from 0V to bus voltage. This energy is not part of loss at turn-off, but actually part of turn-on loss at next hard switching turn-on period. This means that with the fast turn-off speed the GaN E-HEMT can achieve near zero turn-off switching loss.

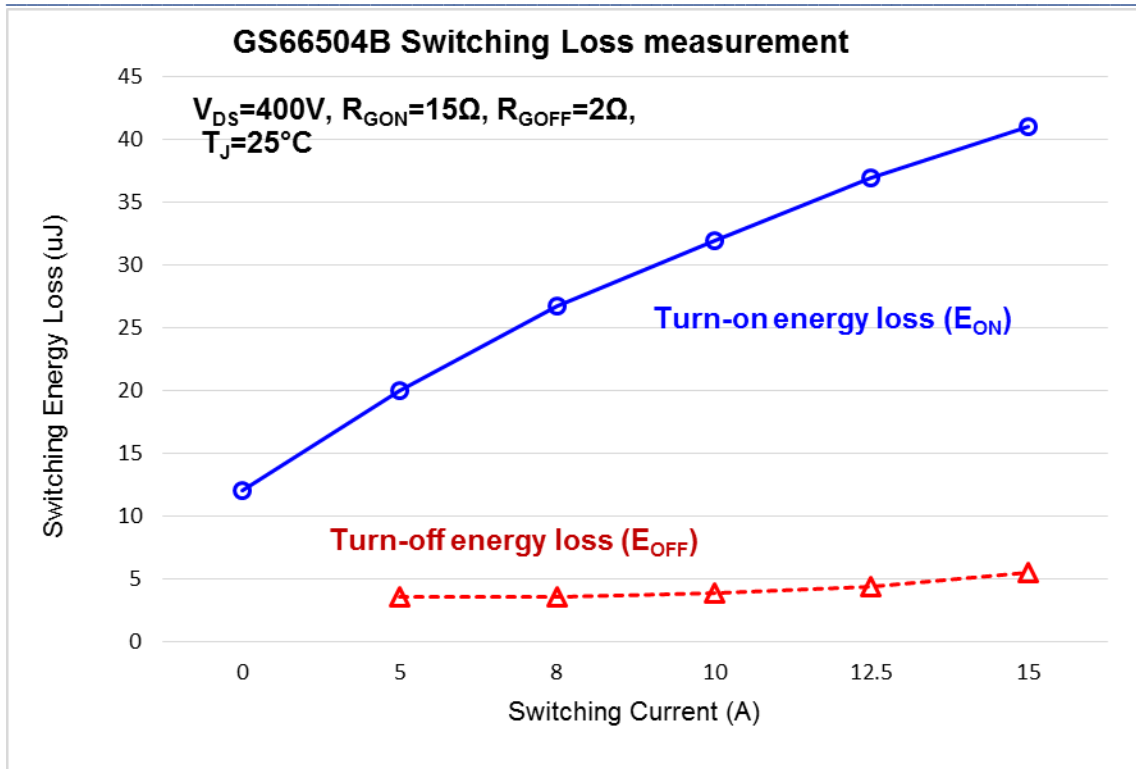


Figure 21 GS66504B Switching Loss Measurement ( $V_{DS} = 400V$ ,  $T_J=25^\circ C$ )

Synchronous Buck Test ( $L=120\mu\text{H}$ ,  $V_{\text{IN}}=400\text{V}$ ,  $V_{\text{OUT}}=200\text{V}$ ,  $D=50\%$ ,  $\text{FSW}=100\text{ kHz}$ ,  $\text{P}_{\text{OUT}}=750\text{W}$ )

The board is converted to a synchronous buck DC/DC converter and demonstrates efficiency 98.5% at 750W. With forced air cooling, the peak device temperature  $T_{\text{J\_MAX}}$  was measured at 60°C at 750W output.

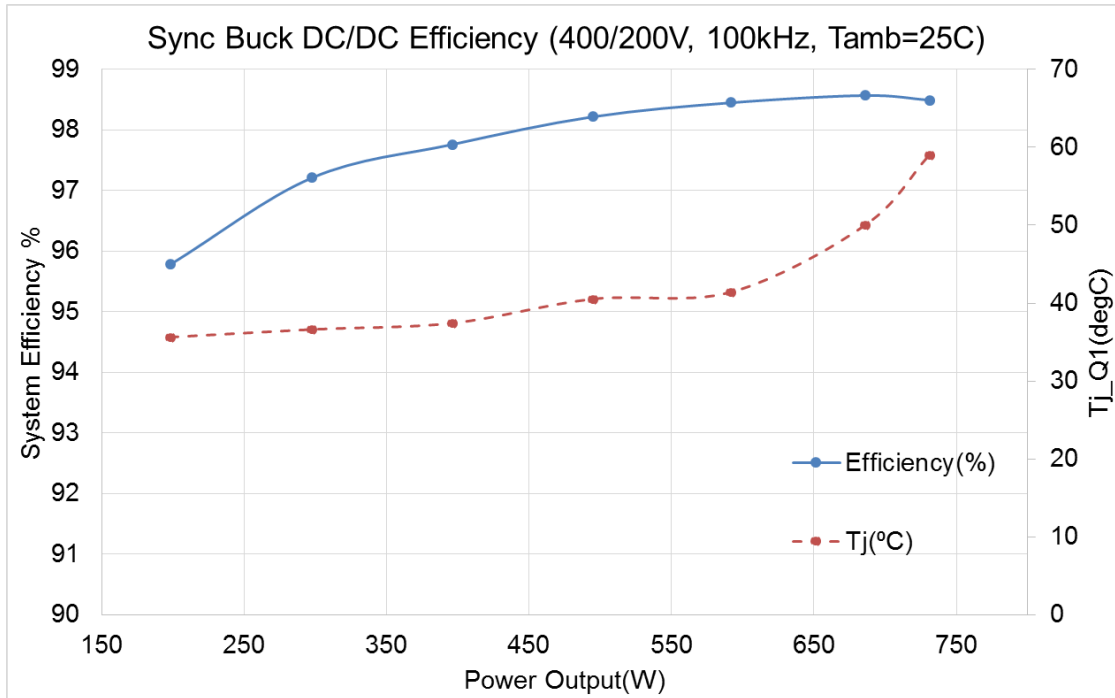


Figure 22 Synchronous Buck Efficiency and thermal measurement


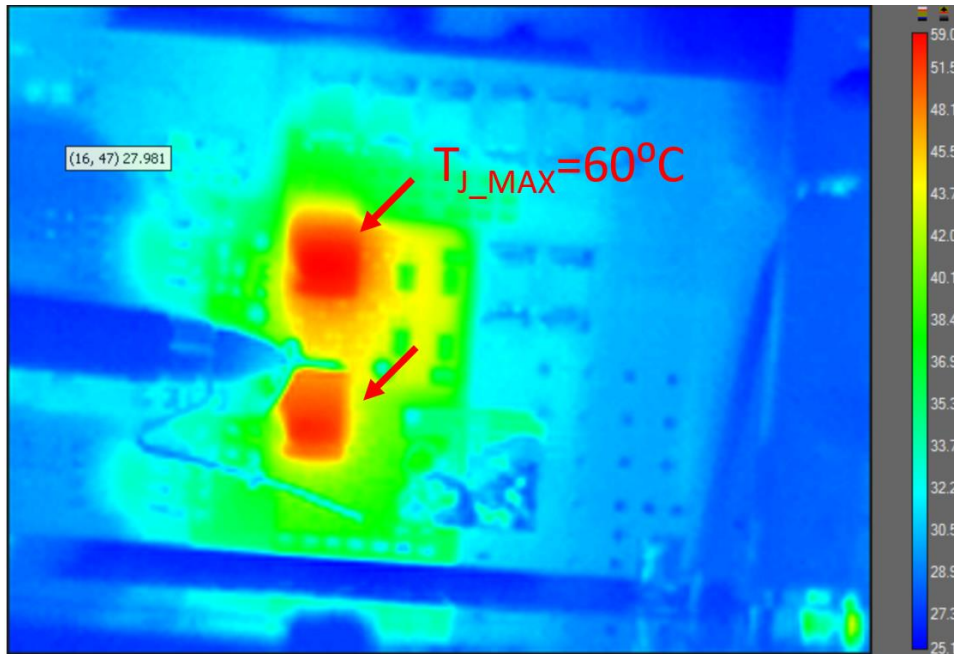



Figure 23 Thermal image (Pout=750W)

## Appendix A - GS66504B-EVBDB

### Circuit schematics

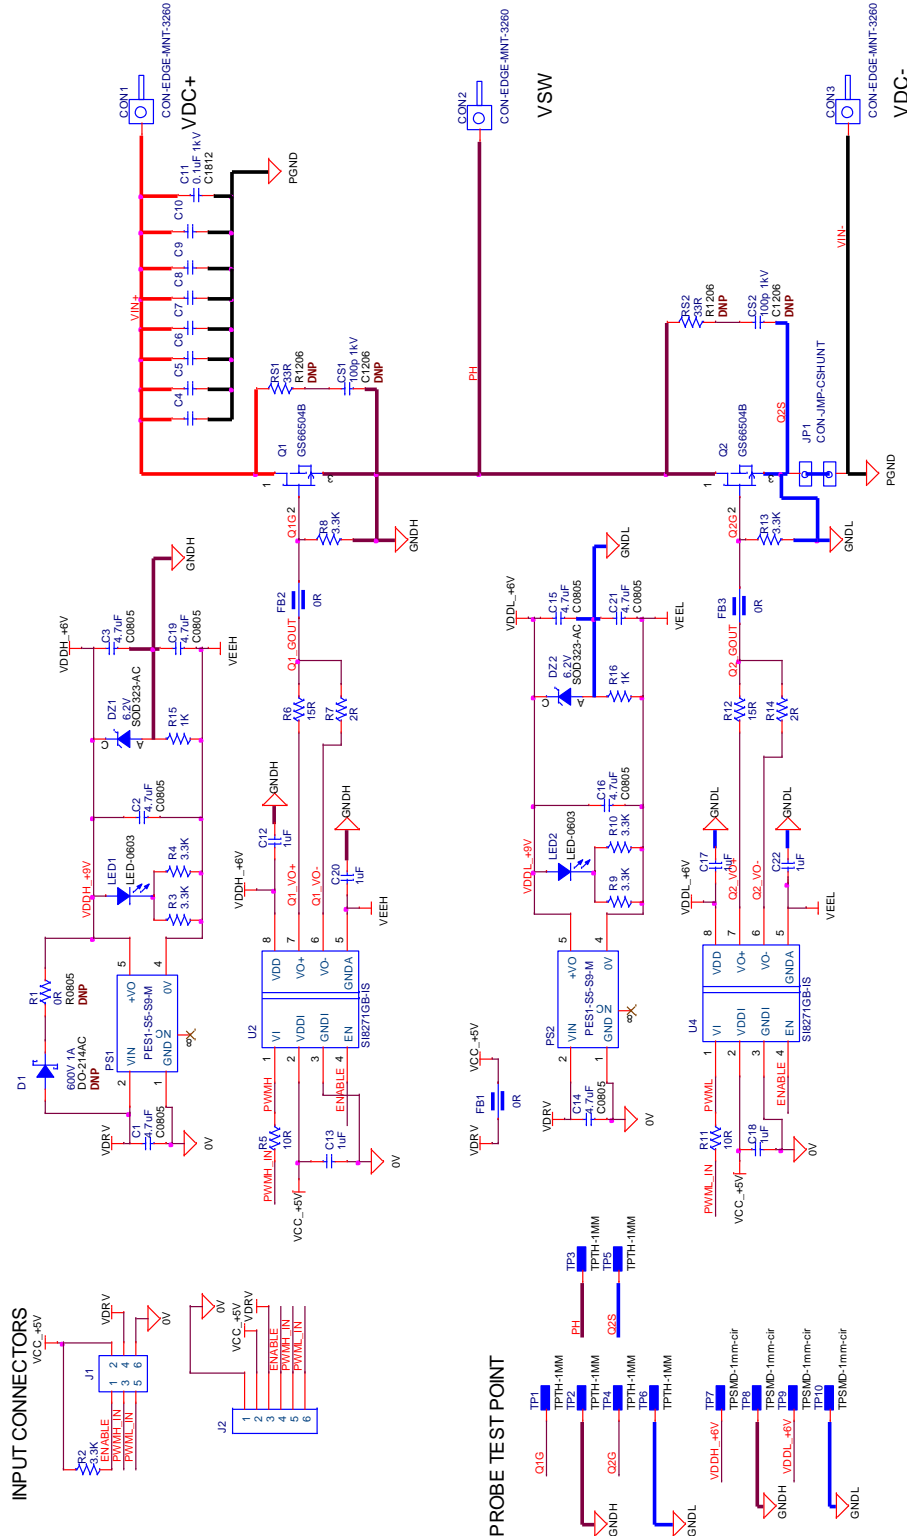


Assembly Drawing (Top)

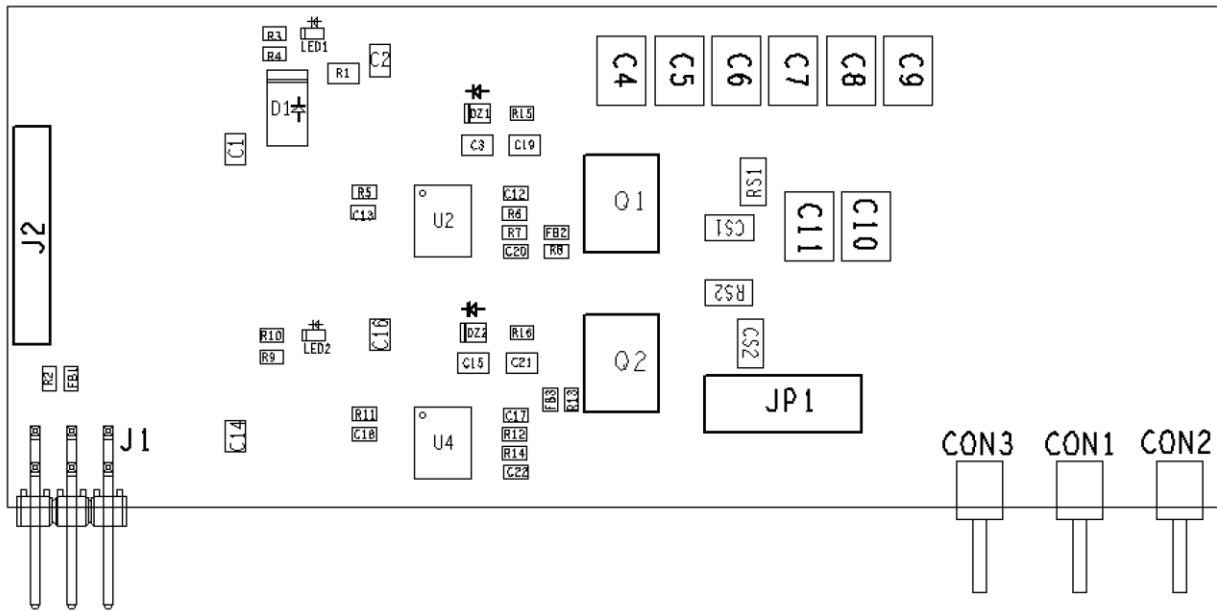

Assembly Drawing (Bottom)


**BOTTOM COMPONENT SIDE**

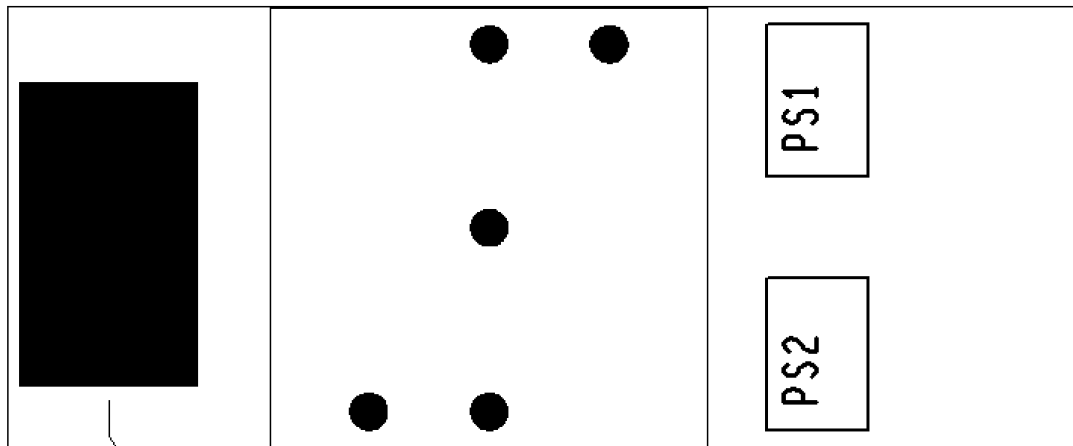


SUGGESTED LOCATION FOR S/N LABEL, INSTALL LABEL AFTER FINAL WASH

PCB layout


Top Layer

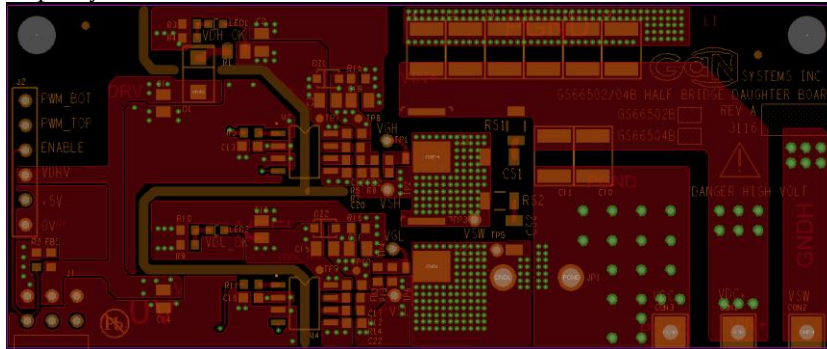


Mid Layer 1

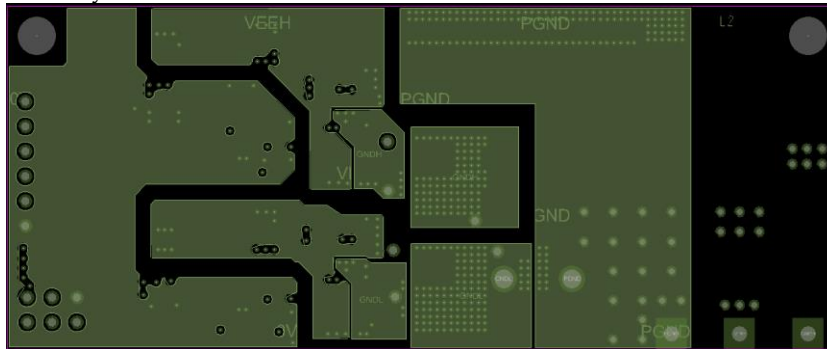

Mid Layer 2

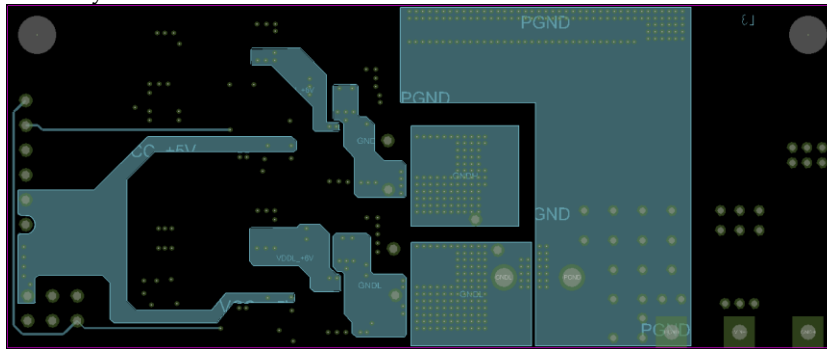

Bottom Layer

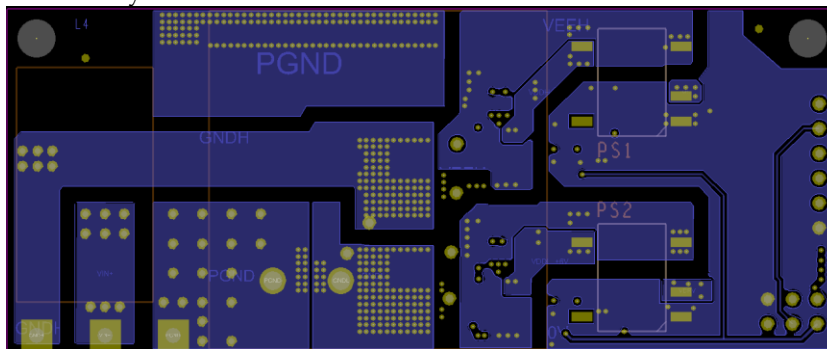




Bill of Materials

Qt Reference	Description	Value	Package footprint	Manufacturer	Part number	Alt. Manufacturer	Alt part number	Assembly Variants		Assembly Note
								GS66502B-EVBDB	GS66504B-EVBDB	
1	PCB	PCB bare 4-layer 2oz. Cu.		Shenzhen Sprint PCB				•	•	
1,3	CONN1, CON2, CON3	CONN PC PIN EDGE MINT	CON-EDGE-MINT-3280	Milli-Max	3620-2-32-15-00-00-08-0			•	•	Mating receptacle 0312-0-15-15-34-27-10-0 on mother board <b>DO NOT INSTALL</b>
2	CS1, CS2	CAP, CER, 100p, 1kV, 1206						•	•	
3	C1, C2, C3, C4, C15, C16, C19, C21	CAP, CER, 4.7uF, 25V, +/-10%, X7R, 0805	C0805	TAIYO YUDEN	TMK212AB7475KG-T	generic 25V X7R 0805		•	•	
4	C4, C5, C6, C7, C8, C9, C10, C11	CAP, CER, 0.1uF, 1kV, +/-10%, X7R, 1812	C1812	KEMET	C1812C104KDRAC7800			•	•	
5	C12, C13, C17, C18, C	CAP, CER, 1uF, 25V, +/-10%, X7R, 0603	C0603	TAIYO YUDEN	TMK107B7105KA-T	generic 25V X7R 0603		•	•	
6	D2, D1, D22	SOD323	SOD323-AC	ON SEMI	MM3Z6V2ST1G			•	•	
7	D1	1A SMA	DO-Z14AC	FAIRCHILD	ES1J			•	•	<b>DO NOT INSTALL</b> Use 0 Ohm JUMPER
8	FB1, FB2, FB3	30R, 3A	R0603	generic	generic			•	•	<b>DO NOT INSTALL</b>
9	J1	CURRENT SHUNT JUMPER	CON-JMP-CSHUNT					•	•	<b>DO NOT INSTALL</b>
10	J1	CONN 3PIN DUAL ROW, 0.1" PITCH, R/A	CON-2X3-P100-RA	SAMTEC	T5W-103-098-G-D-RA	HARWIN INC.	M20-9950345	•	•	<b>DO NOT INSTALL</b>
11	J2	LED, GREEN, SMD 0603	CON-1x6-P100	LITEON	LTST-C191KGKT			•	•	<b>DO NOT INSTALL</b>
13	PS1, PS2	ISO, DC/DC 5-9V, 1W	PS-SMD-PES1-M	CUJI	PES1-S5-S9-M	MOURNSUN	F0599XT-1WR2	•	•	ALT. PART MOURNSUN F0599XT-1WR2
14	Q1, Q2	GaN E-HEMT 650V	GANSYS-GS66504B	GaN Systems	GS66502B			•	•	
15	Q1, Q2	GaN E-HEMT 650V	GANSYS-GS66504B	GaN Systems	GS66504B			•	•	
16	RS1, RS2	RES, 33R, 1%, 1206	R0805	generic	generic			•	•	<b>DO NOT INSTALL</b>
17	R1	RES, 0R, 1%, 0805	R0603	generic	generic			•	•	<b>DO NOT INSTALL</b>
18	R10, R13	RES, 3.3K, 1%/10W, 0603	R0603	generic	generic			•	•	
19	R6, R12	RES, 15R, 1%/10W, 0603	R0603	generic	generic			•	•	
20	R5, R11	RES, 10R, 1%/10W, 0603	R0603	generic	generic			•	•	
21	R7, R14	RES, 2R, 1%/10W, 0603	R0603	generic	generic			•	•	
22	R15, R16	RES, 1K, 1%/10W, 0603	R0603	generic	generic			•	•	
23	TP6	Probe test point	CON-TP-1POS					•	•	<b>DO NOT INSTALL</b>
24	TP7, TP8, TP9, TP10	Probe test point	CON-TP-1POS					•	•	<b>DO NOT INSTALL</b>
25	U2, U4	IC ISO GATE DRIVER 2.5KV/SI8271GB-IS	SOIC-8	SILICON LABS	SI8271GB-IS		SI8271AB-IS	•	•	
<b>Off the board components:</b>										
26	1	heatsink, 35x35mmx25.4mm, black, anodized		SHENZHEN MINGZHI	PY16-020-2			•	•	
27	1	Electrically insulated Thermal pad		Bergquist	BP100-0.005-00-1112	COOL INNOVATION	3-14-1410UBLAN	•	•	

## Appendix B - GS665MB-EVB


### Circuit schematics

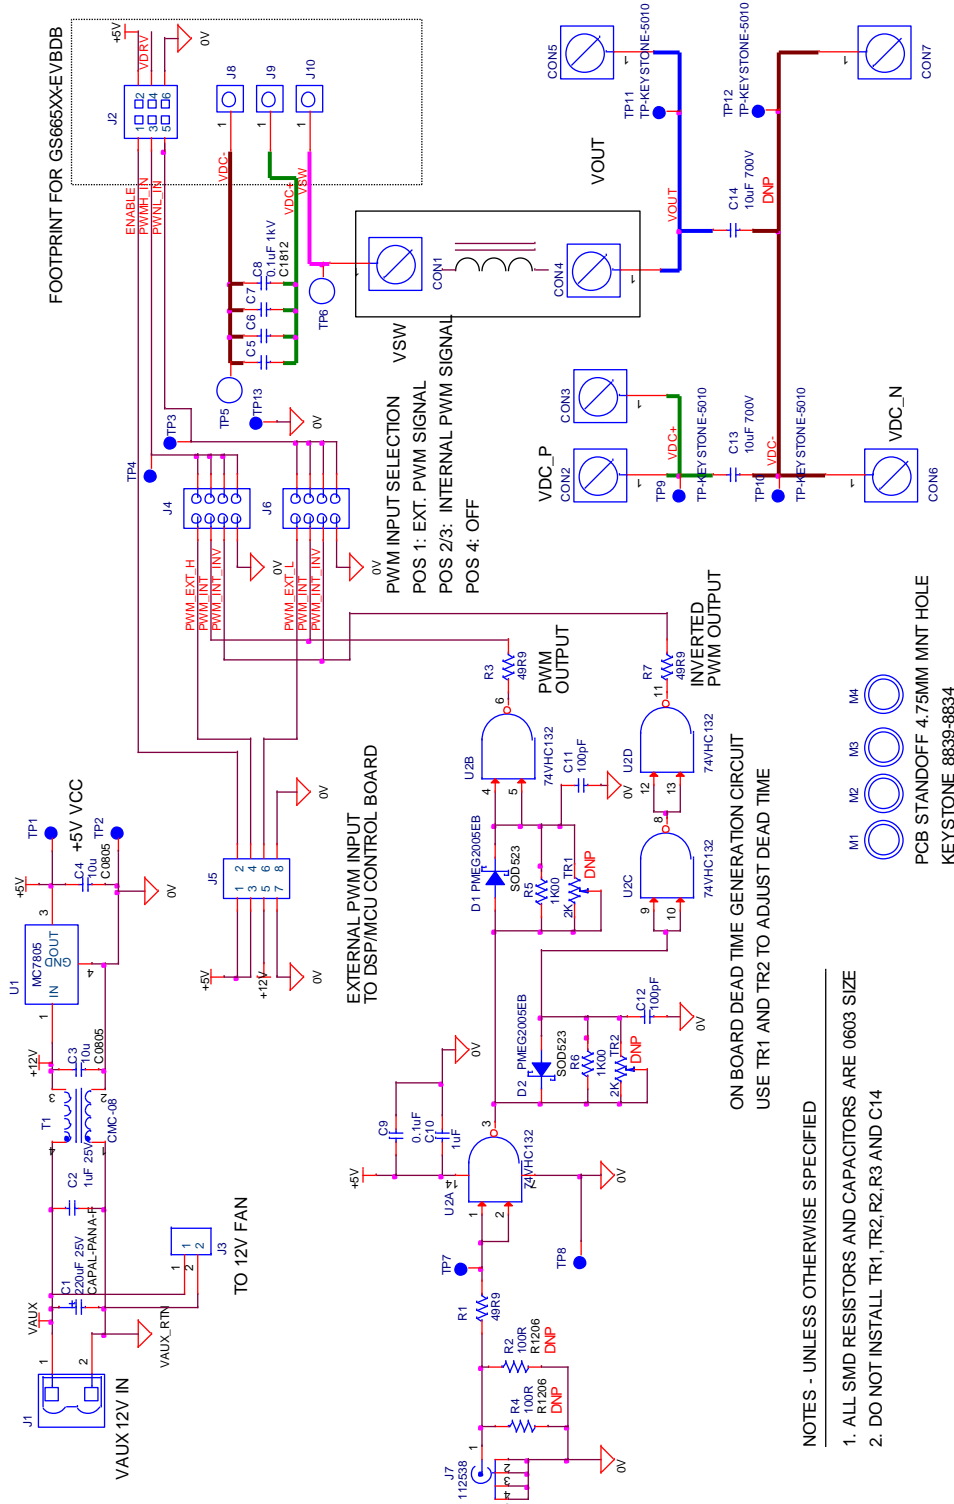

Assembly drawing


**Assembly Top**

TOP COMPONENT SIDE

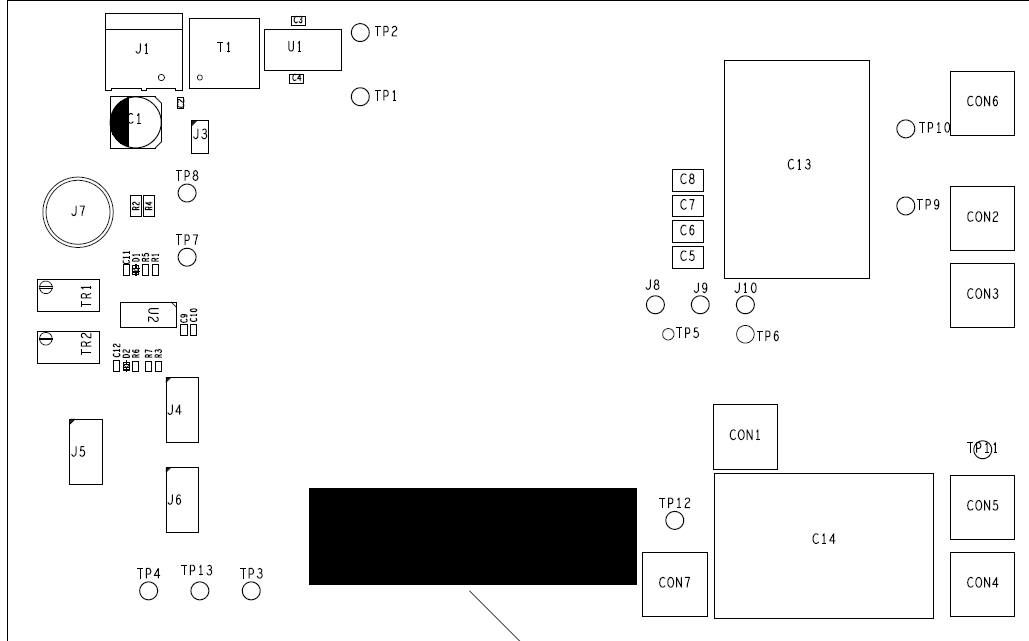

SUGGESTED LOCATION FOR S/N LABEL

**Assembly Bottom**



Bill of Materials

Quantity	Reference	Description	Value	Manufacturer	Part number	Assembly Note
<b>GAN SYSTEMS 650V GAN UNIVERSAL MOTHER BOARD</b> <b>BOARD P/N: GS665EVBMB</b> <b>Revision B1</b> <b>Last Update 6/30/2016</b>						
1	PCB CON1, CON2, CON3, CON4, C 7, ON5, CON6, CON7	PCB bare 2-layer 2oz Cu. <b>TERMINAL SCREW VERTICAL PC MINT</b>	CON-10-32-SCRWMMT	KEYSTONE	8191	DO NOT INSTALL
2	1 C1	CAP ALUM 220UF 20% 25V SMD	220UF 25V	Panasonic	EEE-FK1E221P	
3	1 C2, C10	GENERIC 1UF/25V, 10% X7R SMD 0603	1uF	TAIYO YUDEN	TMK107B7105KA-T	
4	2 C3, C4	GENERIC 10UF/25V, 10% SMD 0805	10uF	TAIYO YUDEN	TMK212BBJ106KG-T	
5	4 C5, C6, C7, C8	GENERIC 0.1uF/1000V, SMD 1812	0.1uF 1kV	KEMET	C1812C104KDRAC7800	
6	1 C9	GENERIC 0.1uF/25V, 10% X7R SMD 0603	0.1uF	TAIYO YUDEN	TMJ107BB7104KAHT	
7	2 C11, C12	GENERIC 100PF/25V 5% NP0 SMD 0603	100pF	KEMET	C0603C101J3GACTU	
8	1 C13, C14	<b>CAP FILM 10UF/600VDC 5%, 27.5MM LEAD SPACING</b>	10uF 700V	KEMET	C44EHLU5100A11J	DO NOT INSTALL C14
9	2 D1, D2	DIODE SCHOTTKY 20V 500MA SOD523	PMEG2005EB	NXP	PMEG2005EB.115	
10	1 J1	TERM BLOCK HDR 2POS R/A 5.08MM	CON-TERM-BLK-2POS-RA	TE CONNECTIVITY	796638-2	
11	1 J1-PLUG	TERM BLOCK BLUG 2POS 5.08MM	CON-CONNECTIVITY	TE CONNECTIVITY	796634-2	
12	1 J2	CONN RCPT 6POS .100 DBL STR PCB	CON-RCPT-2X3-BOT	HARWIN	M20-7950342	MOUNT FROM BOTTOM SIDE CONNECTOR FOR 12V FAN, DO NOT INSTALL
13	1 J3		CON-2POS			
14	2 J4, J6	CONN HEADER 8POS DUAL VERT PCB	CON-JMP-4POS	HARWIN	M20-9980445	
15	1 J5	CONN 8-POS, DUAL ROW 2.54MM	CON-HDR-4X2	AMPHENOL	75869-132LF	
16	1 J7	CONN BNC JACK STR 50 OHM PCB	112538	AMPHENOL	112538	
17	3 J8, J9, J10	CONN RECEPT P/N .032-.046" .075"	CON-RCPT-EDGE MNT	MILLMAX	0312-0-15-.15-34-27-10-0	MATING SOCKET FOR MILLMAX EDGE MNT PIN
18	3 R1, R3, R7	generic 1% smd 0603	49R9	VISHAY DALE	CRCW060349R9FKEA	
19	2 R2, R4	generic 1% smd 1206	100R			DO NOT INSTALL
20	2 R5, R6	generic 1% smd 0603	1K00	VISHAY DALE	CRCW06031K00FKEA	
21	TP1, TP2, TP3, TP4, TP7, TP8, TP9, TP10, TP11, TP12, TP13	TEST POINT PCB	TP-KEYSTONE-5010	KEYSTONE	5010	
22	2 TR1, TR2		2K	RECOM	CMC-08	DO NOT INSTALL
23	1 T1	COMM MODE CHOKE 5.2A TH	CMC-08			
24	1 U1	IC REG LDO 5V 1A DPAK	MC7805	ON SEMI	MC7805BDBTRKG	
25	1 U2	1 IC GATE NAND 4CH 2-INP 14-SOIC	74VHC132	FAIRCHILD	74VHC132MX	
<b>Off the board components:</b>						
26	6 M1, M2, M3, M4, M5, M6	PCB STANDOFF NYLON STACKABLE 4.75M	MECH-STD OFF-KEYSTONE-8	KEYSTONE	8833	PCB SPACER, INSTALL FROM BOTTOM SIDE
27	1 FAN	FAN AXIAL 38X20MM 12VDC WIRE		SUNON FANS	PMD1238PKB1-A(2)GN	SUPPLY LOOSE, DO NOT INSTALL ON THE ASSEMBLY
28	2 JUMPER	JUMPER SHUNT GENERIC		TE CONNECTIVITY	382811-8	INSTALL ON J4 "INT" POSITION AND J6 "INT_INV" POSITION

## Evaluation Board/kit Important Notice

GaN Systems Inc. (GaN Systems) provides the enclosed product(s) under the following **AS IS** conditions:

This evaluation board/kit being sold or provided by GaN Systems is intended for use for **ENGINEERING DEVELOPMENT, DEMONSTRATION, and OR EVALUATION PURPOSES ONLY** and is not considered by GaN Systems to be a finished end-product fit for general consumer use. As such, the goods being sold or provided are not intended to be complete in terms of required design-, marketing-, and/or manufacturing-related protective considerations, including but not limited to product safety and environmental measures typically found in end products that incorporate such semiconductor components or circuit boards. This evaluation board/kit does not fall within the scope of the European Union directives regarding electromagnetic compatibility, restricted substances (RoHS), recycling (WEEE), FCC, CE or UL, and therefore may not meet the technical requirements of these directives, or other related regulations.

If this evaluation board/kit does not meet the specifications indicated in the User's Guide, the board/kit may be returned within 30 days from the date of delivery for a full refund. **THE FOREGOING WARRANTY IS THE EXCLUSIVE WARRANTY MADE BY THE SELLER TO BUYER AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED, IMPLIED, OR STATUTORY, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE. EXCEPT TO THE EXTENT OF THIS INDEMNITY, NEITHER PARTY SHALL BE LIABLE TO THE OTHER FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.**

The user assumes all responsibility and liability for proper and safe handling of the goods. Further, the user indemnifies GaN Systems from all claims arising from the handling or use of the goods. Due to the open construction of the product, it is the user's responsibility to take any and all appropriate precautions with regard to electrostatic discharge.

No License is granted under any patent right or other intellectual property right of GaN Systems whatsoever. **GaN Systems assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or any other intellectual property rights of any kind.**

GaN Systems currently services a variety of customers for products around the world, and therefore this transaction **is not exclusive**.

**Please read the User's Guide and, specifically, the Warnings and Restrictions notice in the User's Guide prior to handling the product.** Persons handling the product(s) must have electronics training and observe good engineering practice standards.

This notice contains important safety information about temperatures and voltages. For further safety concerns, please contact a GaN Systems' application engineer.

## In Canada:

GaN Systems Inc.  
1145 Innovation Drive Suite 101  
Ottawa, Ontario, Canada K2K 3G8  
T +1 613-686-1996

## In Europe:

GaN Systems Ltd., German Branch  
Terminalstrasse Mitte 18,  
85356 München, Germany  
T +49 (0) 8165 9822 7260

## In the United States:

GaN Systems Corp.  
2723 South State Street, Suite 150,  
Ann Arbor, MI. USA 48104  
T +1 248-609-7643

[www.gansystems.com](http://www.gansystems.com)

**Important Notice** – Unless expressly approved in writing by an authorized representative of GaN Systems, GaN Systems components are not designed, authorized or warranted for use in lifesaving, life sustaining, military, aircraft, or space applications, nor in products or systems where failure or malfunction may result in personal injury, death, or property or environmental damage. The information given in this document shall not in any event be regarded as a guarantee of performance. GaN Systems hereby disclaims any or all warranties and liabilities of any kind, including but not limited to warranties of non-infringement of intellectual property rights. All other brand and product names are trademarks or registered trademarks of their respective owners. Information provided herein is intended as a guide only and is subject to change without notice. The information contained herein or any use of such information does not grant, explicitly, or implicitly, to any party any patent rights, licenses, or any other intellectual property rights. General Sales and Terms Conditions apply.  
© 2009-2015 GaN Systems Inc. All rights reserved.